
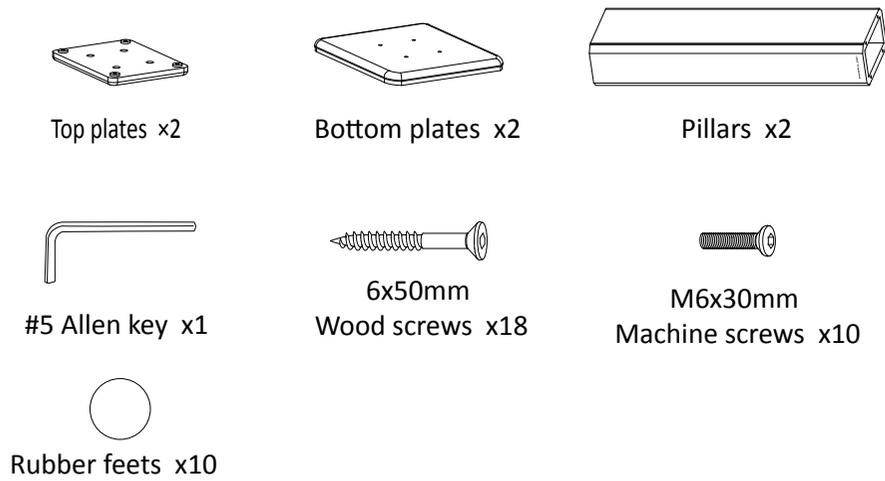


ST300 Stand Assembly Instructions**1. Parts list**

1

2. Assembly


- A. Paste rubber feet to the nut hole of bottom plate firmly.
- B. Use Allen key and the 6x50mm wood screws to lock the bottom and top plates onto the pillar.

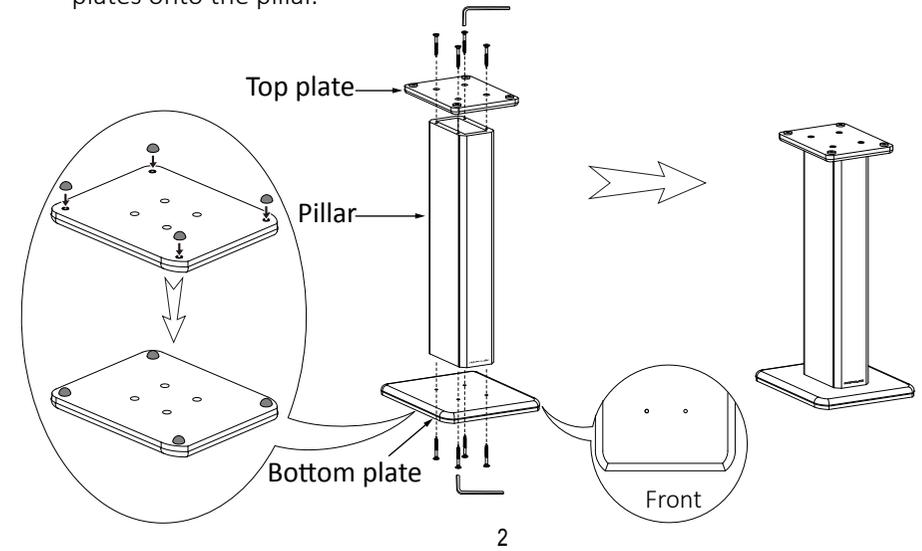

2

3. Secure speaker on stand

- A. Carefully remove the rubber feet on speaker. Use a screw driver to remove the metal feet. Please keep the metal feet and screws in a safe place for future use.

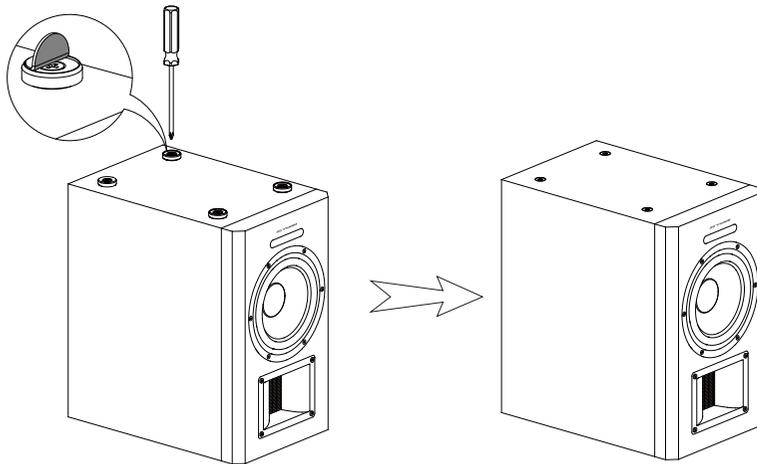

- B. Place speaker on stand, making sure the holes on bottom of speaker align with the 4 holes on the top plate. Use Allen key and the M6x30mm machine screws to lock the speaker securely onto the stand.

